

**4\*10/100Base-TX + 2\*100Base-FX SFP**

**Managed Industrial Ethernet Switch**

**LT-IS3206F-2FX4TX**



**Features:**

- 4\*10/100Base-TX RJ45 ports, 2\*100Base-FX SFP ports
- DC 12~58V input, redundant power supply with polarity reverse/over-voltage protection
- Support Layer 2 management function:  
VLAN/Port Mirroring/IGMP/QoS/LLDP/802.1X/Fiber transceiver DDM  
/IPV6 management/Web/SNMP/Telnet/TFTP/Web upgrading
- Support G.8032 ERPS protocol, recovery time ≤20ms
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 °C ~+75 °C

## Overview

The SmartByte LT-IS3206F-2FX4TX is a highly reliable industrial managed PoE Switch with 4-port 10/100Base-TX and 2-port 100Base-FX fiber optical interfaces. It supports ERPS redundant network and the self-recovery mechanism is less than 20ms on full load which allows you to scheme a reliable Ethernet network by building a redundant ring topology as your back-up solution. LT-IS3206F-2FX4TX supports Web/SNMP/Telnet management, the managed features are such as QoS, VLAN, IGMP, Port mirroring, 802.1X, LLDP, Fiber transceiver DDM, IPV6 management and so on.

LT-IS3206F-2FX4TX is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 12-58VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and crucial.

## Technical specification


<b>Model No.</b>	LT-IS3206F-2FX4TX	
<b>Interface</b>	Fiber ports	Copper RJ45 ports
	2	4
<b>Ethernet</b>	4*10/100-TX RJ45 2*100Base-FX SFP (SC/ST/FC optional)	
<b>Management port</b>	1*RJ45 Console	
<b>Standard</b>	IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3x flow control and back pressure IEEE 802.1D spanning tree protocol IEEE 802.1w rapid spanning tree protocol IEEE 802.1Q VLAN tagging ITU-T G.8032 ERPS IEEE 802.1X port authentication network control IEEE 802.1ab LLDP IEEE 802.3ad LACP	

LED Indicators		
P(Power indicator)	Off: the device is power off or failed	Off: the device is power off or failed
S(System status indicator)	Blinking: device initialization	On: device on normal operation
1-4 (Copper ports)	Green	Yellow
	Off: ports link down	Off: port speed on 10M
	On: ports link up	On: port speed on 100M
	Blinking: data on TX/RX	
5-6 (fiber ports) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
Power parameter		
Input voltage	12-58VDC, redundant power input	
Input current	0.5A Max	
Total consumption	Full loading ≤5 W	
Connector	Removable 4-pin terminal block	
Reverse polarity protection	Support	
Over-voltage protection	Support	
Layer 2 function		
Port aggregation	Support static aggregation Support dynamic aggregation	
Port features	Support IEEE802.3x flow control, Support Port traffic statistics Support port isolation Support network storm suppression based on port bandwidth percentage	
VLAN	Support access mode Support trunk mode Support hybrid mode	
Port mirroring	Support many to one port mirroring	
Ring network protocol	Support STP、RSTP	

	Support G.8032 ERPS protocol , single ring, sub Ring and associated sub ring Recovery time ≤20ms
Multicast	IGMP V1,V2,V3 IGMP snooping
QoS	Ingress Port-based Rate-limit Egress Port-based Rate-limit
Security features	Support 802.1x, port authentication, MAC authentication, RADIUS service Support port isolation
Management and maintenance	Support LLDP Support user management and login authentication Support SNMPV1/V2C/V3 Support web management, HTTP1.1, HTTPS Support Syslog and alarm grading Support RMON(Remote Monitoring) alarm Support NTP Support Ping , Tracert Support optical transceiver DDM function Support TFTP Client Support Telnet Server Support SSH Server Support IPv6 Management Support TFTP, web upgrading
<b>Switching features</b>	
Switching capacity	1.2Gbps
Packet forwarding rate	1.78Mpps
MAC address table	8K
VLAN	4K
Buffer	1M bit
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
<b>Mechanical structure</b>	

Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	30*98*130mm
Weight	0.56 kg
<b>Operating environment</b>	
Operating temperature	-40°C~+75°C
Storage/transportation temperature)	-40°C~+85°C
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
<b>Industrial Standard</b>	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	DIP: IEC 61000-4-11 Level 3 (10V)
	ESD: IEC 61000-4-2 Level 4 (8K/15K)
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
<b>Certification</b>	CCC/CE/FCC/RoHS
<b>Warranty</b>	5 years

### Structure diagram

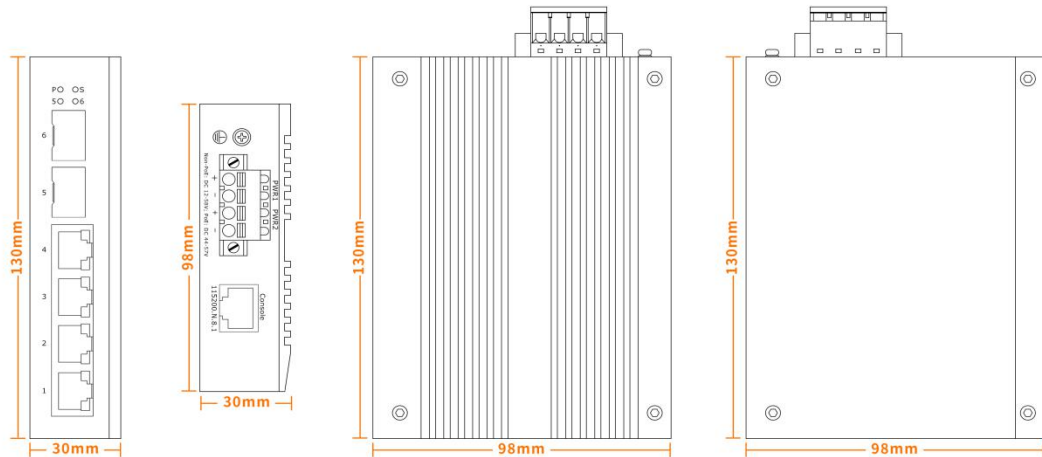

### Order information

Model	Description
LT-IS3206F-2FX4TX	Managed industrial Ethernet switch with 4*10/100Base-TX RJ45 ports and 2*100Base-FX SFP slots, DC12-58V, redundant dual power supply, Din-rail installation. Fiber ports transmission distance depending on the SFP module; Operation temperature: -40°C ~+75°C