

16*10/100/1000Base-T + 2*1G/2.5G/10GBase-X SFP+

L3 Managed Industrial Ethernet Switch

LT-IS6518XG-2XS16GT



Features:

- 16*10/100/1000Base-T RJ45, 2*1G/2.5G/10GBase-X SFP+
- Redundant power 12-58V input with polarity reverse/over-voltage/over-current protection
- Support one digital output for relay alarm (terminal block Pin 5/6)
- Layer 3 features: Supports static and dynamic routing, RIP, OSPF, BGP4, ECMP, VRRP
- Support Layer 2 management function: VLAN/VLAN Classification/QinQ/STP, RSTP, MSTP/Port Mirroring/DHCP/Multicast/ACL/IGMP/QoS/LLDP/802.1X/Dying Gasp/SFP DDM/IPV6 management/Web/SNMP/Telnet/TFTP/Web upgrading
- Support G.8032 ERPS protocol, recovery time ≤20ms
- Support 6kV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 °C ~+75 °C

Overview

The SmartByte LT-IS6518XG-2XS16GT is the highly reliable Layer 3 managed industrial Ethernet switches with 16-port 10/100/1000-T RJ45 and 2-port 10GBase-X SFP+ interfaces. It supports ERPS redundant network and the self-recovery mechanism is less than 20ms on full load which allows you to scheme a reliable Ethernet network by building a redundant ring topology as your back-up solution. LT-IS6518XG-2XS16GT supports Layer 3 static routing & dynamic features and robust layer 2 management function, which can fulfill the special needs of industrial automation applications.

LT-IS6518XG-2XS16GT is also the high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 12-58VDC, redundant power design with polarity reverse/over-voltage/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and critical.

Technical specification

| | | |
|------------------------|---|-------------------|
| Model No. | LT-IS6518XG-2XS16GT | |
| Interface | Fiber ports | Copper RJ45 ports |
| | 2 | 16 |
| Ethernet | 16*10/100/1000Base-T RJ45 2*1G/2.5G/10GBase-X SFP+ | |
| Management port | 1*RJ45 Console port (115200,8,N,1) | |
| Alarm port | One digital output for relay alarm, alarm relay current carry ability: 1A@24VDC | |
| Standard | IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN | |

| | | |
|--|---|-----------------------------------|
| | ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP | |
| LED Indicators | | |
| P (Power indicator) | Off: the device is power off or failed | On: the device power on is normal |
| S (System status indicator) | Blinking: device initialization | On: device on normal operation |
| 1-16 (Copper ports indicators) Green | Off: ports link down | |
| | On: ports link up | |
| | Blinking: data on TX/RX | |
| 1-16 (Speed indicators) Yellow | Off: ports on 10/100M | |
| | On: ports on 1000M | |
| 17-18 (Fiber ports indicators) Green | Off: ports link down | |
| | On: ports link up | |
| | Blinking: data on TX/RX | |
| Power parameter | | |
| Input voltage | 12-58V DC, redundant power input | |
| Input current | 1.5A Max | |
| Total power consumption | Full loading ≤18W | |
| Connector | Removable 6-pin terminal block, Pin 5/6 for relay alarm output | |
| Reverse polarity protection | Support | |
| Over-voltage protection | Support | |
| Over-current protection | Support | |
| Layer 2 functions | | |
| Port aggregation | Support GE port aggregation Support 2.5GE aggregation Support 10GE aggregation Support static aggregation Support LACP dynamic aggregation Up to 64 aggregation groups and up to 8 ports per group | |

| | |
|------------------------------|---|
| Port features | Support IEEE802.3x flow control, Support interface counters, Support port isolation, Port mirroring (One-to-One, Many-to-One) Support loop detection(Port-based; VLAN-based) Support broadcast storm suppression(broadcast; unknown multicast; unknown unicast) |
| Mac-address table management | Support static Mac-address management Support dynamic Mac-address Management Support filtering Mac-address Support MAC limit based on port and VLAN Support MAC flapping based on port and VLAN |
| VLAN | Support access mode Support trunk mode Support hybrid mode |
| VLAN classification | Mac Based VLAN IP Based VLAN Protocol Based VLAN |
| GVRP | Normal mode Fixed mode Forbidden mode |
| QinQ | Port-based QinQ VLAN-based QinQ (VLAN-stacking; VLAN-mapping) Flow-based QinQ |
| LLDP | LLDP (Link Layer Discovery Protocol) |
| Ring network protocol | Support IEEE802.1D-STP Support IEEE802.1W-RSTP Support IEEE802.1S-MSTP |
| | Support G.8032 ERPS protocol, single ring, sub Ring and major ring Recovery time $\leq 20ms$ |
| L2 Multicast | |
| IGMP snooping | Support IGMP snooping |
| Group address | Support group address |
| Security functions | |
| ACL | IP Standard ACL MAC extend ACL IP extend ACL |


| | |
|---|---|
| | IPv6 ACL |
| QoS | Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS |
| 802.1x | Port access control Mac-address access control RADIUS server |
| Port-security | Port-security |
| IP source guard | IP Port/MAC binding |
| ARP-check | Support ARP-check and ARP packet filtering for illegal users |
| Access control | Support Telnet/SSH/HTTP/HTTPS user access control |
| Management & Maintenance functions | |
| User Management | Support password protection Support user authorization management |
| SNMP | Supporting SNMP V1/V2C/V3 version |
| Web Management | Web Management Support HTTP V1.1 Support HTTPS |
| CLI management | Console/Telnet command line management |
| RMON | Support RMON(Remote Monitoring) alarm |
| Firmware upgrade | Firmware upgrade |
| Fault Detection | Ping/Tracerout Dying gasp Support optical transceiver DDM function |
| Cable detection | Support copper port cable detection |
| NTP | Network Time Protocol |
| Syslog/Debug | Syslog/Debug Syslog send to three servers |
| Configuration import/export | Support FTP/TFTP remote import/export |
| Dual partition management | Support dual partition switching |
| Application Protocol Functions | |
| DHCP Snooping | DHCP snooping trust port Support remote-id/circuit-id configuration |

| | |
|---------------------------------------|--|
| | DHCP option-82 |
| DHCP client | Support DHCP client |
| Telnet server | Support telnet server |
| Telnet client | Support telnet client |
| SSH server | Support SSH server |
| TACACS | Support TACACS(the terminal access controller accesses the control system) |
| sflow | Support network traffic analysis |
| TFTP | Support TFTP Client |
| Layer 3 functions | |
| ARP | ARP table aging |
| DHCP server | |
| IPv4 / IPv6 | static routing |
| ECMP | Support ECMP (Equal-cost multi-path routing) |
| | Support the configuration of ECMP Max next-hop |
| | Support capacity balanced configuration |
| Route policy | IPv4 prefix-list |
| VRRP | Virtual Router Redundancy Protocol |
| Routing Protocol Specification | |
| RIP | RIPv1/v2 |
| OSPFv2 | OSPFv2 |
| BGP4 | BGP4 |
| | BGP Support Routing Recursive ECMP |
| | Support to view the number of neighbors and up/down state |
| IS-IS | IS-ISv4 |
| Routing entry | 13K |
| Switching features | |
| Switching capacity | 72Gbps |

| | |
|------------------------------------|--|
| Packet forwarding rate | 107.13Mpps |
| MAC address table | 16K |
| VLAN | 4K |
| Buffer | 12Mbit |
| Forwarding delay | <5us |
| Jumbo Frame | Support 10Kbytes |
| MDX/MIDX | Support |
| Watchdog | Support |
| Mechanical structure | |
| Case protection | IP40 |
| Installation method | Din-rail |
| Dimension(W*D*H)mm | 54*115*158mm |
| Weight | 1.45 kg |
| Operating environment | |
| Operating temperature | -40°C~+75°C |
| Storage/transportation temperature | -40°C~+85°C |
| Relative humidity | Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH |
| Industrial Standard | |
| EMS | Surge protection of power: IEC 61000-4-5 6KV/4KV (8/20us) Surge protection of Ethernet ports: IEC 61000-4-5 6KV/2KV (10/700us) RS: IEC 61000-4-3 80 MHz-1 GHz: 10 V/m EFT: IEC 61000-4-4 4K/2K CS: IEC 61000-4-6 10V ESD: IEC 61000-4-2 Contact: 8K; Air: 15K |

| | |
|----------------------|----------------------------|
| EMI | FCC Part 15B Class A |
| Shock | IEC 60068-2-27 |
| Free fall | IEC 60068-2-32 |
| Vibration | IEC 60068-2-6 |
| Certification | CCC/CE/UKCA/RoHS/REACH/FCC |
| MTBF | > 200,000 hours |
| Warranty | 5 years |

Structure diagram

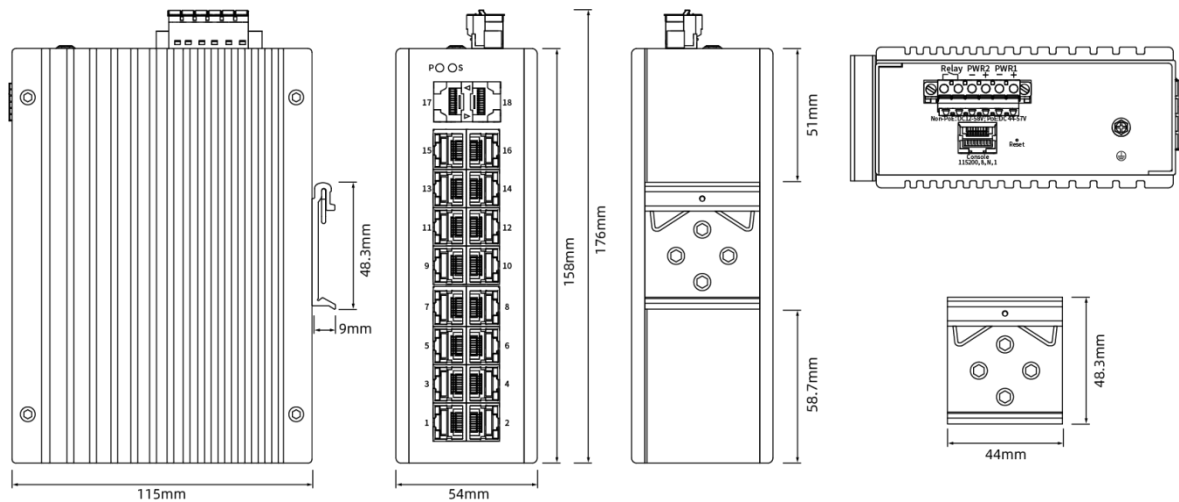

Order information

| Model | Description |
|---------------------|---|
| LT-IS6518XG-2XS16GT | L3 Managed industrial Ethernet switch with 16*10/100/1000Base-T RJ45 ports and 2*1G/2.5G/10GBase-X SFP+ slots, DC12-58V input, redundant dual power supply, Din-rail installation. Operation temperature: -40°C ~ +75°C |