

**48\*10/100/1000Base-T + 4\*1G/2.5/10GBase-X SFP+**

**L3 Managed Industrial Rack-mount Ethernet Switch**

**LT-IS6552XG-4XS48GT-U**



**Features:**

- 48\*10/100/1000Base-T, 4\*1G/2.5/10GBase-X SFP+
- AC/DC redundant power supply with polarity reverse/over-voltage/over-current protection
- Support USB one key configuration and upgrading
- Layer 3 features: Supports static and dynamic routing, RIP, OSPF, BGP4, ECMP, VRRP
- Layer 2 features: VLAN; ERPS, STP/RSTP/MSTP; Link aggregation, IGMP snooping, port mirroring, QinQ, 802.1X, port isolation, RMON, NTP client, DHCP snooping/client, Ping/Tracert test, ACL, QoS and SFP DDM function
- Management and maintenance: IPv4 and IPv6 management; Support Web, SNMP, CLI, Telnet/SSH management method; Support user management, system log, configuration upload/download through web interface, firmware upgrade via HTTP/TFTP/USB
- Support G.8032 ERPS protocol, recovery time ≤20ms
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and rack-mount hardware design
- Operation temperature: -40 °C ~+ 70 °C

## Overview

The SmartByte LT-IS6552XG-4XS48GT-U is the highly reliable Layer 3 managed industrial Ethernet switch with 48-port 10/100/1000Base-T RJ45 and 4-port 1G/2.5G/10GBase-X SFP+. With full gigabit downlink and 10G uplink capability, it can provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. It supports G.8032 ERPS, MSTP/RSTP/STP redundancy technologies, LT-IS6552XG-4XS48GT-U supports Layer 3 static routing & dynamic routing features and robust layer 2 management and secure function, which all making them ideal for large-scale industrial networks.

LT-IS6552XG-4XS48GT-U is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range voltage input with redundant power design AC 、 DC or AC/DC selection, robust IP40 fan-less housing with rack-mount installation, wide operation temperature from -40°C to 70 °C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and critical.

## Technical specification

<b>Model No.</b>	LT-IS6552XG-4XS48GT-U	
<b>Interface</b>	Fiber ports	Copper RJ45 ports
	4	48
<b>Ethernet</b>	48*10/100/1000Base-T RJ45 4*1G/2.5G/10GBase-X SFP+	
<b>Management port</b>	1*RJ45 Console port (115200,8,N,1) , 1*USB 2.0 for configuration and firmware update	
<b>Standard</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control	

	IEEE 802.1ab LLDP IEEE 802.3ad LACP	
<b>LED Indicators</b>		
<b>P</b> (Power indicator)	Off: the device is power off or failed	On: the device power on is normal
<b>S</b> (System status indicator)	Blinking: device initialization	On: device on normal operation
<b>USB</b> (USB status indicator)	Off: USB flash drive not insert or not detected by device	
	On: USB flash drive is detected by device	
	Blinking: the device is reading and writing the data from USB flash drive	
<b>1-48</b> (Copper ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
<b>1-48</b> (Copper speed indicators) Yellow	Off: ports on 10/100M	
	On: ports on 1000M	
<b>49-52</b> (Fiber ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
<b>Power parameter</b>		
Input voltage	36-75VDC 100~240VAC redundant power input	
Input current	2A DC/AC input Max	
Total power consumption	Full loading ≤60W	
Connector	Removable 2*2-pin terminal block(DC/DC) 3-pin AC socket(AC/AC)	
Reverse polarity protection	Support	
Over-voltage protection	Support	
Over-current protection	Support	
<b>Layer 2 functions</b>		

Port aggregation	<ul style="list-style-type: none"> <li>Support GE port aggregation</li> <li>Support 2.5GE aggregation</li> <li>Support 10GE aggregation</li> <li>Support static aggregation</li> <li>Support LACP dynamic aggregation</li> <li>Up to 64 aggregation groups and up to 8 ports per group</li> </ul>
Port features	<ul style="list-style-type: none"> <li>Support IEEE802.3x flow control</li> <li>Support interface counters</li> <li>Support port isolation</li> <li>Port mirroring ( One-to-One, Many-to-One)</li> <li>Support loop detection(Port-based; VLAN-based)</li> <li>Support broadcast storm suppression(broadcast; unknown multicast; unknown unicast)</li> </ul>
Mac-address table management	<ul style="list-style-type: none"> <li>Support static Mac-address management</li> <li>Support dynamic Mac-address Management</li> <li>Support filtering Mac-address</li> <li>Support MAC limit based on port and VLAN</li> <li>Support MAC flapping based on port and VLAN</li> </ul>
VLAN	<ul style="list-style-type: none"> <li>Support access mode</li> <li>Support trunk mode</li> <li>Support hybrid mode</li> </ul>
VLAN classification	<ul style="list-style-type: none"> <li>Mac Based VLAN</li> <li>IP Based VLAN</li> <li>Protocol Based VLAN</li> </ul>
GVRP	<ul style="list-style-type: none"> <li>Normal mode</li> <li>Fixed mode</li> <li>Forbidden mode</li> </ul>
QinQ	<ul style="list-style-type: none"> <li>Port-based QinQ</li> <li>VLAN-based QinQ (VLAN-stacking; VLAN-mapping)</li> <li>Flow-based QinQ</li> </ul>
LLDP	LLDP (Link Layer Discovery Protocol)
Ring network protocol	<ul style="list-style-type: none"> <li>Support IEEE802.1D-STP</li> <li>Support IEEE802.1W-RSTP</li> <li>Support IEEE802.1S-MSTP</li> </ul>
	<ul style="list-style-type: none"> <li>Support G.8032 ERPS protocol, single ring, sub Ring and major ring</li> <li>Recovery time <math>\leq 20\text{ms}</math></li> </ul>
<b>L2 Multicast</b>	
IGMP snooping	Support IGMP snooping


Group address	Support group address
<b>Security functions</b>	
ACL	IP Standard ACL MAC extend ACL IP extend ACL IPv6 ACL
QoS	Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS
802.1x	Port access control Mac-address access control RADIUS server
Port-security	Port-security
IP source guard	IP Port/MAC binding
ARP-check	Support ARP-check and ARP packet filtering for illegal users
Access control	Support Telnet/SSH/HTTP/HTTPS user access control
<b>Management &amp; Maintenance functions</b>	
User Management	Support password protection Support user authorization management
SNMP	Supporting SNMP V1/V2C/V3 version
Web Management	Web Management Support HTTP V1.1 Support HTTPS
CLI management	Console/Telnet command line management
RMON	Support RMON(Remote Monitoring) alarm
Firmware upgrade	Firmware upgrade
Fault Detection	Ping/Tracerout Dying gasp Support optical transceiver DDM function
Cable detection	Support copper port cable detection
NTP	Network Time Protocol
Syslog/Debug	Syslog/Debug Syslog send to three servers

Configuration import/export	Support FTP/TFTP remote import/export Support USB import/export
Dual partition management	Support dual partition switching
<b>Application Protocol Functions</b>	
DHCP Snooping	DHCP snooping trust port Support remote-id/circuit-id configuration DHCP option-82
DHCP client	Support DHCP client
Telnet server	Support telnet server
Telnet client	Support telnet client
SSH server	Support SSH server
TACACS	Support TACACS(the terminal access controller accesses the control system)
sflow	Support network traffic analysis
TFTP	Support TFTP Client
<b>Layer 3 functions</b>	
ARP	ARP table aging
DHCP server	
IPv4 / IPv6	static routing
ECMP	Support ECMP (Equal-cost multi-path routing)
	Support the configuration of ECMP Max next-hop
	Support capacity balanced configuration
Route policy	IPv4 prefix-list
VRRP	Virtual Router Redundancy Protocol
<b>Routing Protocol Specification</b>	
RIP	RIPv1/v2
OSPFv2	OSPFv2
BGP4	BGP4
	BGP Support Routing Recursive ECMP
	Support to view the number of neighbors and up/down state


IS-IS	IS-ISv4
Routing entry	13K
<b>Switching features</b>	
Switching capacity	336Gbps
Packet forwarding rate	499.9Mpps
MAC address table	16K
VLAN	4K
Buffer	12M bit
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
<b>Mechanical structure</b>	
Case protection	IP40
Installation method	Rack mountable
Dimension(W*D*H)mm	440*45*280mm
Weight	6 kg
<b>Operating environment</b>	
Operating temperature	-40℃~+ 70℃
Storage/transportation temperature	-40℃~+ 85℃
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
<b>Industrial Standard</b>	

EMS	<p>Surge protection of power: IEC 61000-4-5 DC:6KV/6KV (8/20us), AC: 4K/2K</p> <p>Surge protection of Ethernet ports: IEC 61000-4-5 6KV/2KV (10/700us)</p> <p>RS: IEC 61000-4-3 80 MHz-1 GHz: 10 V/m</p> <p>EFT: IEC 61000-4-4 power 4K, signal 2K</p> <p>CS: IEC 61000-4-6 10V</p> <p>ESD: IEC 61000-4-2 Contact: 8K; Air: 15K</p>
EMI	FCC Part 15B Class A
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Certification	CCC/CE/UKCA/RoHS/REACH/FCC
MTBF	> 200,000 hours
Warranty	5 years


### Structure diagram

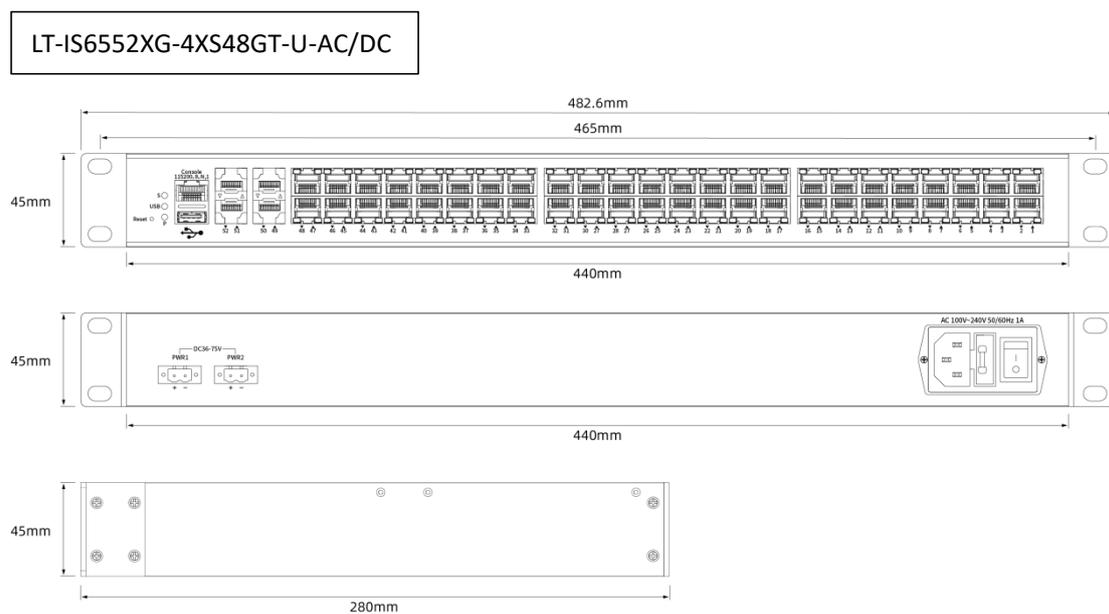

LT-IS6552XG-4XS48GT-U-2AC

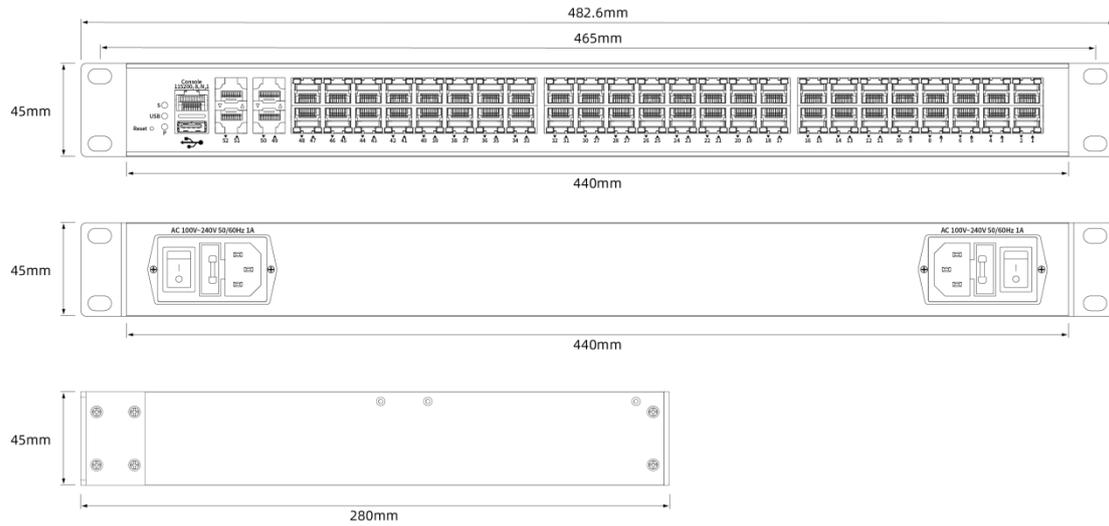

LT-IS6552XG-4XS48GT-U-2DC

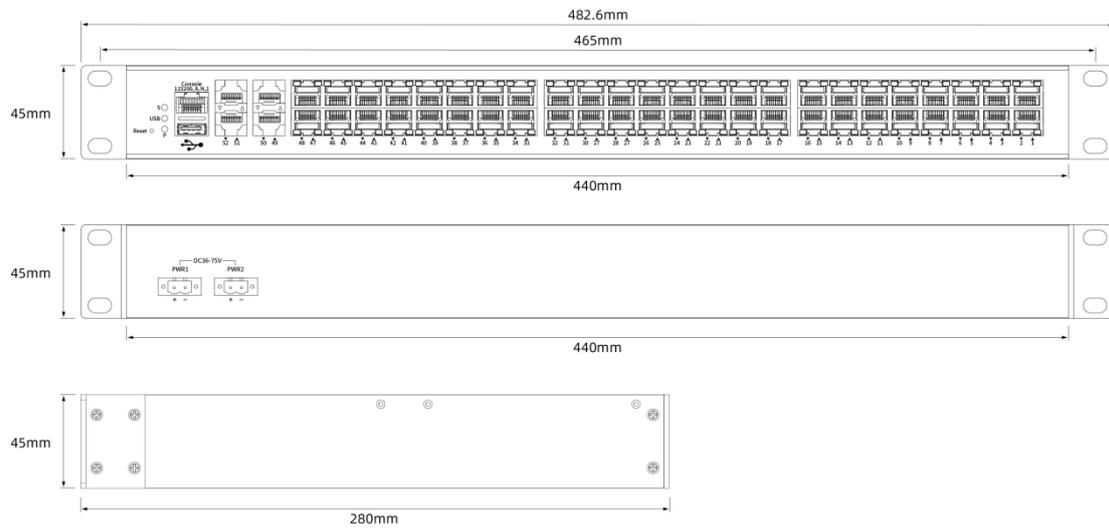

**Order information**

Model	Description
LT-IS6552XG-4XS48GT-U-2AC	L3 Managed rack-mount industrial Ethernet switch with 4*1G/2.5G/10GBase-X SFP+ ports, 48*10/100/1000Base-T RJ45 ports. Dual AC 100-240V 50/60Hz input, Operation temperature -40°C to 70 °C
LT-IS6552XG-4XS48GT-U-AC/DC	L3 Managed rack-mount industrial Ethernet switch with 4*1G/2.5G/10GBase-X SFP+ ports, 48*10/100/1000Base-T RJ45 ports. AC 100-240V 50/60Hz and DC 36-75V input, Operation temperature -40°C to 70 °C
LT-IS6552XG-4XS48GT-U-2DC	L3 Managed rack-mount industrial Ethernet switch with 4*1G/2.5G/10GBase-X SFP+ ports, 48*10/100/1000Base-T RJ45 ports. Dual DC 36-75V input, Operation temperature -40°C to 70 °C