

8*10/100/1000Base-T + 4*1G/2.5G SFP


Layer 2+ Managed PoE Switch

LT-S8312GP-4GX8GT

Overview:

SmartByte LT-S8312GP-4GX8GT is a Layer 2+ full gigabit managed POE switch, which features 8-port 10/100/1000Base-T RJ45 PoE ports and 4*1G/2.5G SFP ports. It supports Layer 3 static routing with a high-performance switching architecture and offers wire-speed transportation capability for delivering a cost effective Gigabit Ethernet solution to meet the converged applications for enterprise customer's networks. More and more corporations are adapting new IT technologies over the network such as voice over IP, video conference to improve productivity and save operation expenditure. The LT-S8312GP-4GX8GT series provide comprehensive end to end QoS as well as flexible and rich management , security settings, total power consumption up to **120 watts** for different kinds of PoE applications, which provides a quick, safe and cost-effective Power over Ethernet network solution for small businesses and enterprises.

Picture

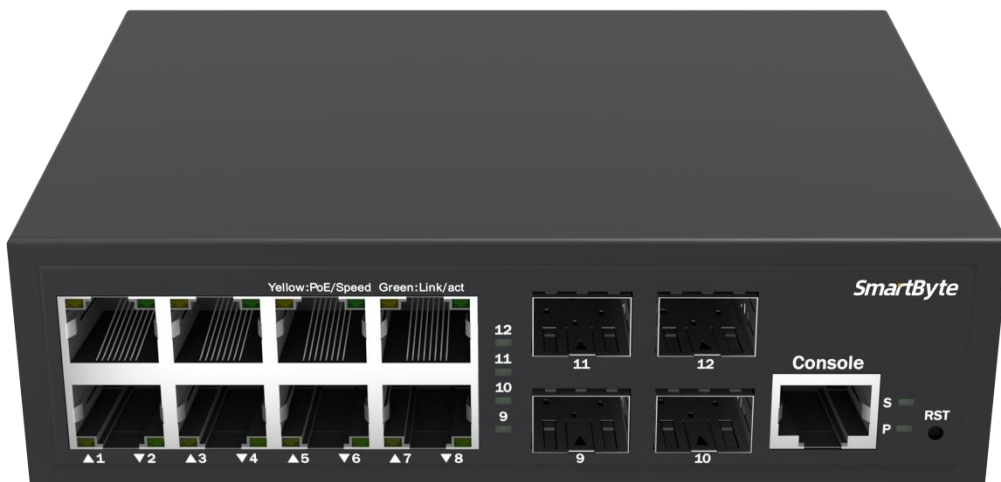

Features

- 8 *10/100/1000BASE-T Gigabit Ethernet RJ45 PoE ports, 4*1G/2.5G SFP slots, 1*RJ45 console interface for switch basic management and setup
- Complies with IEEE 802.3at, IEEE802.3af standard. Max output power per port can reach 30W(PoE+)
- Smart and standard PoE chipset to detect the PD equipments automatically, never burn the PD equipments
- Layer 3 features: Supports IPv4/IPv6 static routing, DHCP server
- Port aggregation: Supports GE ports, 2.5GE port aggregation, static and dynamic aggregation
- VLAN : Supports access, trunk , hybrid mode and VLAN classification, including the Mac based VLAN, IP based VLAN and protocol based VLAN
- QinQ: Supports port-based, VLAN-based and flow-based QinQ
- Port Mirroring: Many to one port mirroring
- Layer 2 ring network protocol: Supports STP, RSTP, MSTP, G.8032 ERPS protocol, single ring, sub ring
- Multicast: Supports IGMP snooping
- QoS: QoS class, remarking, Supports SP, WRR queue scheduling, Ingress/Engress port-based rate-limit and policy-based QoS
- Security: Support Dot1x, port authentication, mac authentication, RADIUS service; Support port-security, ip source guard, IP/Port/MAC binding, arp-check and ARP packet filtering for illegal users and port isolation
- Management : Supports LLDP, user management and login authentication; SNMPV1/V2C/V3; web management, HTTP1.1, HTTPS; Syslog and alarm grading ; RMON (Remote Monitoring) alarm, event and history record; NTP, temperature monitoring; Ping、Tracert and optical transceiver DDM function; Supports TFTP Client, Telnet Server, SSH Server and IPv6 Management; PoE management
- Firmware update, configure backup/restore through Web GUI, FTP and TFTP

Technical specification

Model No.	LT-S8312GP-4GX8GT	
Interface	Fiber ports	Copper RJ45 ports
	4	8
Ethernet	8*10/100/1000Base-T RJ45 PoE 4*1000/2500Base-X SFP	
Management port	1*RJ45 Console port (115200,8,N,1)	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP IEEE 802.3af IEEE 802.3at	
LED Indicators		
P (Power indicator)	Off: the device is power off or failed	On: the device power on is normal
S (System status indicator)	Blinking: device initialization	On: device on normal operation
1-8 (Copper ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
1-8 (PoE status indicators) Yellow	Off: PoE not working	
	On: PoE working	
9-12 (Fiber ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	


Power parameter	
Input voltage	DC 52V
Total power consumption	≤120W
Over-current protection	Support
Layer 2 functions	
Port aggregation	Support GE port aggregation Support 2.5GE aggregation Support static aggregation Support LACP dynamic aggregation Up to 64 aggregation groups and up to 8 ports per group
Port features	Support IEEE802.3x flow control Support interface counters Support port isolation Port mirroring (One-to-One, Many-to-One) Support loop detection(Port-based; VLAN-based) Support broadcast storm suppression(broadcast; unknown multicast; unknown unicast)
Mac-address management	Support static Mac-address management Support dynamic Mac-address Management Support filtering Mac-address Support MAC limit based on port and VLAN Support MAC flapping based on port and VLAN
VLAN	Support access mode Support trunk mode Support hybrid mode
VLAN classification	Mac Based VLAN IP Based VLAN Protocol Based VLAN
GVRP	Normal mode Fixed mode Forbidden mode
QinQ	Port-based QinQ VLAN-based QinQ (VLAN-stacking; VLAN-mapping) Flow-based QinQ
LLDP	LLDP (Link Layer Discovery Protocol)
Ring network protocol	Support IEEE802.1D-STP Support IEEE802.1W-RSTP Support IEEE802.1S-MSTP

	Support G.8032 ERPS protocol, single ring, sub Ring and major ring Recovery time $\leq 20\text{ms}$
L2 Multicast	
IGMP snooping	Support IGMP snooping
Group address	Support group address
Security functions	
ACL	IP Standard ACL MAC extend ACL IP extend ACL IPv6 ACL
QoS	Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS
802.1x	Port access control Mac-address access control RADIUS server
Port-security	Port-security
IP source guard	IP Port/MAC binding
ARP-check	Support ARP-check and ARP packet filtering for illegal users
Access control	Support Telnet/SSH/HTTP/HTTPS user access control
Management & Maintenance functions	
User Management	Support password protection Support user authorization management
SNMP	Supporting SNMP V1/V2C/V3 version
Web Management	Web Management Support HTTP V1.1 Support HTTPS
CLI management	Console/Telnet command line management
RMON	Support RMON(Remote Monitoring) alarm
Firmware upgrade	Firmware upgrade
Fault Detection	Ping/Tracerout Support optical transceiver DDM function

Cable detection	Support copper port cable detection
PoE management	Support 802.3af/802.3at
	Support PD watchdog
	Support PoE priority management
	Support Max PoE power configuration for each port
	Support alarm waterline configuration
	Support reserved power configuration
NTP	Network Time Protocol
Syslog/Debug	Syslog/Debug Syslog send to three servers
Configuration import/export	Support FTP/TFTP remote import/export
Dual partition management	Support dual partition switching
Application Protocol Functions	
DHCP Snooping	DHCP snooping trust port Support remote-id/circuit-id configuration DHCP option-82
DHCP client	Support DHCP client
Telnet server	Support telnet server
Telnet client	Support telnet client
SSH server	Support SSH server
TACACS	Support TACACS(the terminal access controller accesses the control system)
sflow	Support network traffic analysis
TFTP	Support TFTP Client
Layer 3 functions	
ARP	ARP table aging
DHCP server	
IPv4 / IPv6	static routing
Switching features	
Switching capacity	36Gbps

Packet forwarding rate	53.5Mpps
MAC address table	16K
VLAN	4K
Buffer	12Mbit
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
Mechanical structure	
Installation method	Desktop; Rack-mount optional
Dimension(W*D*H)mm	152*115*44mm
Weight	3.03kg (including the 120W power adaptor)
Operating environment	
Operating temperature	-0°C~+50°C
Storage/transportation temperature	-10°C~+70°C
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
Certification	CCC/CE/UKCA/RoHS/REACH/FCC
MTBF	> 100,000 hours

Structure diagram

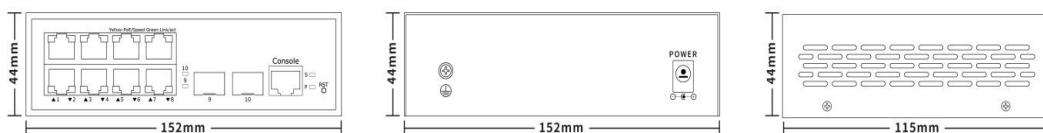

Order information

Model	Description
LT-S8312GP-4GX8GT	Layer 2+ managed PoE switch with 4*1G/2.5G SFP slots + 8*10/100/1000M RJ45 PoE ports, DC52V, total power consumption 120W