

**16\*10/100/1000Base-T PoE + 4\*1G/2.5G/10GBase-X SFP+**

**Layer 2+ Managed Industrial PoE++ Switch**

**LT-IS6320XGP-4XS16GT-4BT Series**



**Features:**

- 16\*10/100/1000Base-T, 4\*1G/2.5/10G Base-X SFP+
- Redundant DC 44-57V input with polarity reverse/over-voltage/over-current protection
- Complies with IEEE802.3af PoE, IEEE802.3at PoE+ and IEEE802.3bt PoE++ standard
- Support USB one key configuration & upgrading ,DI/DO/RS485 optional
- Layer 3 feature: Support IPv4/IPv6 static routing, DHCP server
- Layer 2 features: VLAN; ERPS, STP/RSTP/MSTP; Link aggregation, IGMP snooping, port mirroring, QinQ, 802.1X, port isolation, RMON, NTP client, DHCP snooping/client, Ping/Tracert test, ACL, QoS and SFP DDM function
- Management and maintenance: IPv4 /IPv6 management, PoE management; Support Web, SNMP, CLI, Telnet/SSH management method; Support user management, system log, configuration upload/download through web interface, firmware upgrade via HTTP/TFTP/USB
- Support G.8032 ERPS protocol, recovery time  $\leq 20\text{ms}$
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature:  $-40\text{ }^{\circ}\text{C} \sim +70\text{ }^{\circ}\text{C}$

## Overview

The SmartByte LT-IS6320XGP-4XS16GT-4BT series are the highly reliable Layer 2+ managed industrial PoE switches with 16-port 10/100/1000Base-T RJ45 and 4-port 1G /2.5/10GBase-X SFP+. They comply with IEEE802.3af PoE, IEEE802.3at PoE+, IEEE802.3bt PoE++ standard protocol, the Max power output consumption per port can reach 90W (1-4 ports), which are the idea solution for those high power consumption industrial networking PDs. With full gigabit downlink and 10G uplink capability, they can provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. They support DI/DO/RS485, G.8032 ERPS, MSTP/RSTP/STP redundancy technologies, powerful Layer 2 management and secure function, which all making them ideal for large-scale industrial networks.

LT-IS6320XGP-4XS16GT-4BT series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, including redundant power supply with DC44-57V input, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 70 °C as well as high-level EMI/EMC capability. They are the best choices for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and critical.

## Technical specification

<b>Model No.</b>	LT-IS6320XGP-4XS16GT-4BT / LT-IS6320XGP-4XS16GT-D-4BT	
<b>Interface</b>	Fiber ports	Copper RJ45 ports
	4	16
<b>Ethernet</b>	16*10/100/1000Base-T RJ45 PoE/PoE+/PoE++ (1-4 ports support PoE++) 4*1G/2.5G/10GBase-X SFP+	
<b>Management port</b>	1*RJ45 Console port (115200,8,N,1) , 1*USB 2.0 for configuration and firmware update	
<b>Data &amp; Alarm channel(optional)</b>	1 channel RS485 1 channel DI (digital input) 1 channel DO (digital output)	
<b>Standard</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE 802.3ae 10GBase-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol	

	IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP IEEE802.3af PoE IEEE802.3at PoE+ IEEE802.3bt PoE++	
<b>LED Indicators</b>		
<b>P1/P2</b> (Power indicator) Green	Off: the device is power off or failed	On: the device power on is normal
<b>SYS</b> (System status indicator)	Blinking: device initialization	On: device on normal operation
<b>USB</b> (USB status indicator) Green	Off: USB flash drive not insert or not detected by device	
	On: USB flash drive is detected by device	
	Blinking: the device is reading and writing the data from USB flash drive	
<b>ALM</b> (Fault status indicator) Red	Off: Device on normal working state	On: Fault alarm
<b>Ring</b> (Ring network indicator)	Off: Ring network disable	On: Ring network enable
<b>1-16</b> (Copper ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
<b>1-16</b> (PoE status indicators) Yellow	Off: PoE not working	
	On: PoE working	
<b>17-20</b> (Fiber ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
<b>Power parameter</b>		
Input voltage	44-57VDC(802.3af) 52-57VDC(802.3at/802.3bt) redundant power input	
Input current	6A DC/DC input Max	
Total power consumption	Full loading without PoE ≤24W Single power input: PoE power budget ≤240W (-40℃~+ 70℃) Dual power input: PoE power budget ≤370W (-40℃~+ 60℃)	

	*Dual power input must be the same as DC voltage
Connector	Removable 2*2-pin terminal block
Reverse polarity protection	Support
Over-voltage protection	Support
Over-current protection	Support
<b>Layer 2 functions</b>	
Port aggregation	Support GE port aggregation Support 2.5GE aggregation Support 10GE aggregation Support static aggregation Support LACP dynamic aggregation Up to 64 aggregation groups and up to 8 ports per group
Port features	Support IEEE802.3x flow control Support interface counters Support port isolation Port mirroring ( One-to-One, Many-to-One) Support loop detection(Port-based; VLAN-based) Support broadcast storm suppression(broadcast; unknown multicast; unknown unicast)
Mac-address table management	Support static Mac-address management Support dynamic Mac-address Management Support filtering Mac-address Support MAC limit based on port and VLAN Support MAC flapping based on port and VLAN
VLAN	Support access mode Support trunk mode Support hybrid mode
VLAN classification	Mac Based VLAN IP Based VLAN Protocol Based VLAN
GVRP	Normal mode Fixed mode Forbidden mode
QinQ	Port-based QinQ VLAN-based QinQ (VLAN-stacking; VLAN-mapping) Flow-based QinQ
LLDP	LLDP (Link Layer Discovery Protocol)

Ring network protocol	Support IEEE802.1D-STP Support IEEE802.1W-RSTP Support IEEE802.1S-MSTP
	Support G.8032 ERPS protocol, single ring, sub Ring and major ring Recovery time $\leq 20$ ms
<b>L2 Multicast</b>	
IGMP snooping	Support IGMP snooping
Group address	Support group address
<b>Security functions</b>	
ACL	IP Standard ACL MAC extend ACL IP extend ACL IPv6 ACL
QoS	Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS
802.1x	Port access control Mac-address access control RADIUS server
Port-security	Port-security
IP source guard	IP Port/MAC binding
ARP-check	Support ARP-check and ARP packet filtering for illegal users
Access control	Support Telnet/SSH/HTTP/HTTPS user access control
<b>Management &amp; Maintenance functions</b>	
User Management	Support password protection Support user authorization management
SNMP	Supporting SNMP V1/V2C/V3 version
Web Management	Web Management Support HTTP V1.1 Support HTTPS
CLI management	Console/Telnet command line management
RMON	Support RMON(Remote Monitoring) alarm

Firmware upgrade	Firmware upgrade
Fault Detection	Ping/Tracerout Dying gasp Support optical transceiver DDM function
Cable detection	Support copper port cable detection
PoE management	Support 802.3af/802.3at/802.3bt
	Support PD watchdog
	Support PoE priority management
	Support Max PoE power configuration for each port
	Support alarm waterline configuration
	Support reserved power configuration
NTP	Network Time Protocol
Syslog/Debug	Syslog/Debug Syslog send to three servers
Configuration import/export	Support FTP/TFTP remote import/export Support USB import/export
Dual partition management	Support dual partition switching
<b>Application Protocol Functions</b>	
DHCP Snooping	DHCP snooping trust port Support remote-id/circuit-id configuration DHCP option-82
DHCP client	Support DHCP client
Telnet server	Support telnet server
Telnet client	Support telnet client
SSH server	Support SSH server
TACACS	Support TACACS(the terminal access controller accesses the control system)
sflow	Support network traffic analysis
TFTP	Support TFTP Client
<b>Layer 3 functions</b>	
ARP	ARP table aging
DHCP server	


IPv4 / IPv6	static routing
<b>Switching features</b>	
Switching capacity	112Gbps
Packet forwarding rate	166.6Mpps
MAC address table	16K
VLAN	4K
Buffer	12M bit
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
<b>Mechanical structure</b>	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	110*115*158mm
Weight	LT-IS6320XGP-4XS16GT-4BT: 2.1kg; LT-IS6320XGP-4XS16GT-D-4BT: 2.2kg
<b>Operating environment</b>	
Operating temperature	-40℃~+ 70℃
Storage/transportation temperature	-40℃~+ 85℃
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
<b>Industrial Standard</b>	

EMS	<p>Surge protection of power: IEC 61000-4-5 DC:6KV/6KV (8/20us)</p> <p>Surge protection of Ethernet ports: IEC 61000-4-5 6KV/2KV (10/700us)</p> <p>RS: IEC 61000-4-3 80 MHz-1 GHz: 10 V/m</p> <p>EFT: IEC 61000-4-4 power 4K, signal 2K</p> <p>CS: IEC 61000-4-6 10V</p> <p>ESD: IEC 61000-4-2 Contact: 8K; Air: 15K</p>
EMI	FCC Part 15B Class A
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
<b>Certification</b>	CCC/CE/UKCA/RoHS/REACH/FCC
<b>MTBF</b>	> 200,000 hours
<b>Warranty</b>	5 years




**Structure diagram**

LT-IS6320XGP-4XS16GT-4BT

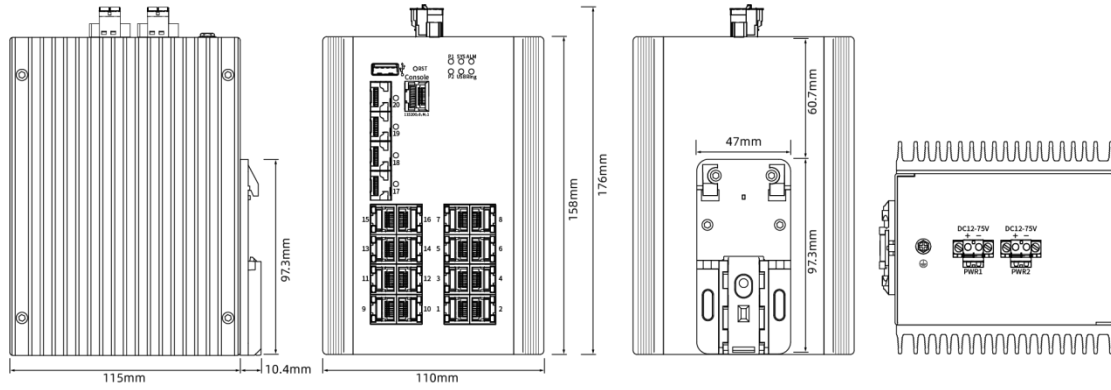

LT-IS6320XGP-4XS16GT-D-4BT

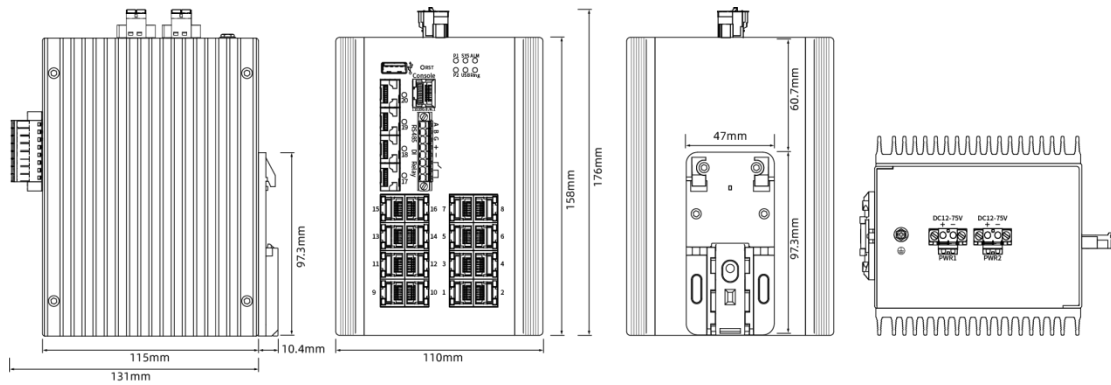

**Order information**

Model	Description
LT-IS6320XGP-4XS16GT-4BT	Layer 2+ managed industrial PoE switch with 4*1G/2.5G/10GBase-X SFP+ ports , 16*10/100/1000Base-T RJ45 PoE ports(1-4 ports support PoE++ 90W). Dual redundant DC 44-57V input , Din-rail installation; Operation temperature -40°C to 70 °C
LT-IS6320XGP-4XS16GT-D-4BT	Layer 2+ managed industrial PoE switch with 4*1G/2.5G/10GBase-X SFP+ ports , 16*10/100/1000Base-T RJ45 PoE ports(1-4 ports support PoE++ 90W). Support DI/DO/RS485; Dual redundant DC 44-57V input , Din-rail installation; Operation temperature -40°C to 70 °C