

16*10/100/1000Base-T + 8*1G SFP/RJ45 Combo + 4*1G/2.5G/10G SFP+


Layer 2 Managed PoE Switch

LT-S8228XGP-4XS16GT8GC

Overview:

SmartByte LT-S8228XGP-4XS16GT8GC is the Layer 2 managed PoE switch. The series deliver full Gigabit access and unparalleled scalability to 10G performance. The LT-S8228XGP-4XS16GT8GC provides comprehensive end to end QoS as well as flexible and rich management , security settings, which can meet the high speed, secure and smart requirement for small and medium-size enterprise networks based on cost effective price. The powerful network security features also make the LT-S8228XGP-4XS16GT8GC perform effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications. With total power consumption up to **440W (850w optional)**, It offers a rack-mountable, affordable, safe and reliable power solution for SMBs deploying Power over Ethernet networks, or requiring enhanced data security and network traffic management.

Picture

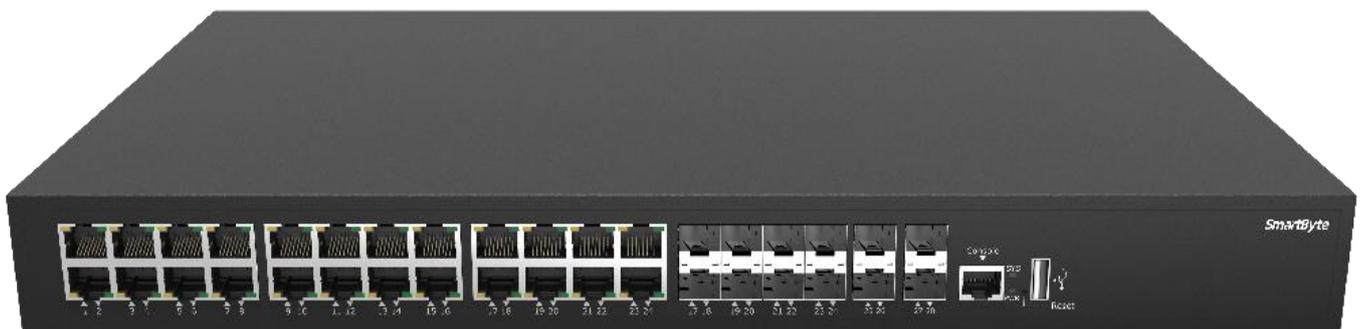

Features

- 4*1G/2.5G/10G SFP+ ports, 16*10/100/1000M RJ45 PoE ports, 8*1G SFP/RJ45 Combo ports, 1*RJ45 console interface for switch basic management and setup
- Complies with IEEE 802.3at, IEEE802.3af standard. Max output power per port can reach 30W(PoE+)
- Smart and standard PoE chipset to detect the PD equipments automatically, never burn the PD equipments
Port aggregation: Supports GE ports, 2.5GE and 10GE port aggregation, static and dynamic aggregation
- VLAN : Supports access, trunk , hybrid mode and VLAN classification, including the Mac based VLAN, IP based VLAN and protocol based VLAN
- QinQ: Supports port-based, VLAN-based and flow-based QinQ
- Port Mirroring: Many to one port mirroring
- Layer 2 ring network protocol: Supports STP, RSTP, MSTP, G.8032 ERPS protocol, single ring, sub ring
- Multicast: Supports IGMP snooping
- QoS: QoS class, remarking, Supports SP, WRR queue scheduling, Ingress/Egress port-based rate-limit and policy-based QoS
- Security: Support Dot1x, port authentication, mac authentication, RADIUS service; Support port-security, ip source guard, IP/Port/MAC binding, arp-check and ARP packet filtering for illegal users and port isolation
- Management : Supports LLDP, user management and login authentication; SNMPV1/V2C/V3; web management, HTTP1.1, HTTPS; Syslog and alarm grading ; RMON (Remote Monitoring) alarm, event and history record; NTP, temperature monitoring; Ping、 Tracert and optical transceiver DDM function; Supports TFTP Client, Telnet Server, SSH Server and IPv6 Management; PoE management
- Firmware update, configure backup/restore through Web GUI, FTP and TFTP


Technical specification

Model	LT-S8228XGP-4XS16GT8GC
Fixed ports	4*1G/2.5G/10G SFP+ ports, 16*10/100/1000M RJ45 PoE ports, 8*1G SFP/RJ45 Combo ports
Management port	1*RJ45 Console
PoE	Complies with IEEE 802.3at, IEEE802.3af standard. Max output power per port can reach 30W(PoE+) Support 1/2(+) 3/6(-) Endspan Support Non-standard PD
Switching capacity	128Gbps
Packet forwarding rate	190.4Mpps
MAC address table	16K
Buffer	12M bit
Port aggregation	Support gigabit port, 2.5GE and 10GE port aggregation Support static and dynamic aggregation
Port features	Support IEEE802.3x flow control, Port traffic statistics, port isolation Support network storm suppression based on port bandwidth percentage
VLAN	Support access, trunk and hybrid mode
VLAN Classification	Mac Based VLAN IP Based VLAN Protocol Based VLAN
QinQ	Basic QinQ (Port-based QinQ) Flexible Q in Q(VLAN-based QinQ) QinQ(Flow-based QinQ)
Port mirroring	Many to one (Port Mirroring)
Layer 2 ring network protocol	Support STP、RSTP、MSTP Support G.8032 ERPS protocol, single ring, sub ring and other ring
DHCP	DHCP Client

	DHCP Snooping
Multicast	IGMP snooping
ACL	IP Standard ACL MAC extend ACL IP extend ACL
QoS	QoS Class, Remarking Support SP, WRR queue scheduling Ingress Port-based Rate-limit Egress Port-based Rate-limit Policy-based QoS
Security	Support Dot1x, port authentication, MAC authentication, RADIUS service Support port-security Support ip source guard, IP/Port/MAC binding Support ARP-check and ARP packet filtering for illegal users Support port isolation
Management and maintenance	Support LLDP Support user management and login authentication Support SNMPV1/V2C/V3 Support web management, HTTP1.1, HTTPS Support Syslog and alarm grading Support RMON (Remote Monitoring) alarm, event and history record Support NTP Support temperature monitoring Support Ping、Tracert Support optical transceiver DDM function Support TFTP Client Support Telnet Server Support SSH Server Support IPv6 Management Support PoE management Support FTP, TFTP, WEB upgrading

Dimension(mm)	440*245*44mm
Power supply	VAC input Rated voltage range: 100-240V Frequency: 50/60Hz
Fan	Support fan speed control
Consumption	Total power consumption≤440W (850W optional)
Power surge protection	6KV, IEC 61000-4-5 Level X (8/20us)
Ethernet ports surge protection	4KV, IEC 61000-4-5 Level 4 (10/700us)
Working temperature	0°C-50°C
Humidity	Working humidity: 10%-90%RH Storage humidity: 5%-95%RH

Structure diagram

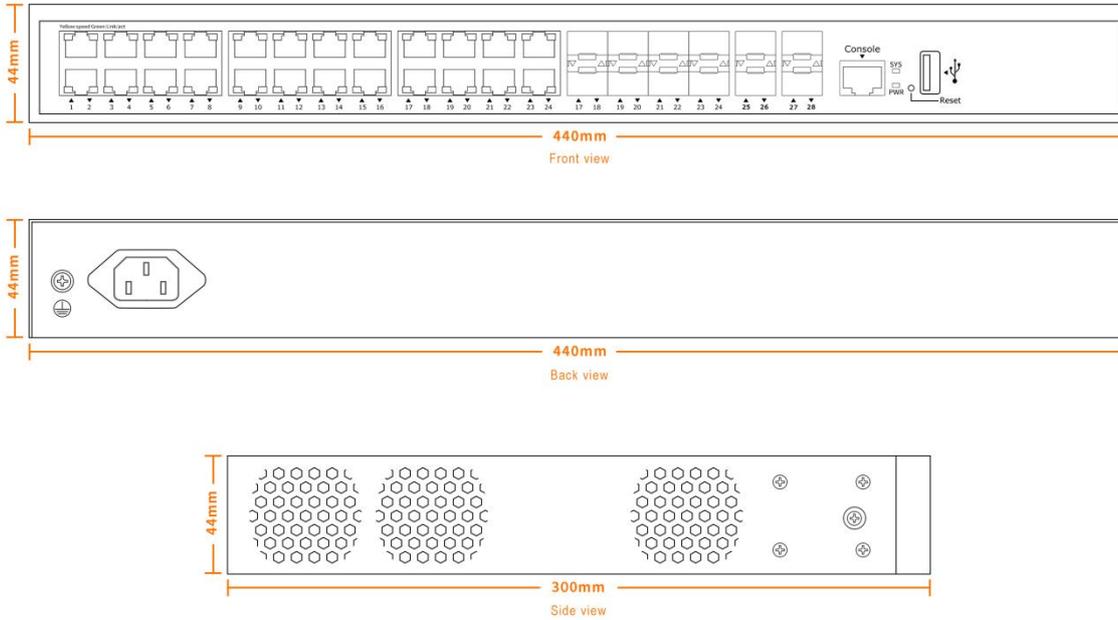

Order information

Model	Description
LT-S8228XGP-4XS16GT8GC	Layer 2 managed PoE switch with 4*1G/2.5G/10G SFP+ slots , 16*10/100/1000M RJ45 PoE ports , 8*1G SFP/RJ45 Combo ports , AC 100-240V 50/60Hz, total power consumption 440W (850W optional)